

EP 438


Threaded Sealing Plugs with assembled washer

Threaded sealing plug design EP 436 complete with washer provides an outstanding seal force useable under complicated working conditions





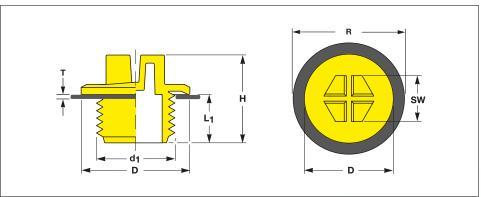



Metric DIN 3852-1 / DIN ISO 6149-1

All dimensions in mm

Thread Size	Flange	Thread Length		Spanner Size	Washer		Туре	Reference No.	
d₁	D	L₁	Н	sw	T	R			
M 10 × 1	15.4	8.0	15.0	7	1.0	16.5	yellow	EP 438 – M 10 × 1	
M 12 × 1.5	18.5	9.0	16.5	10	1.0	19.9	yellow	EP 438 – M 12 × 1.5	
M 14 × 1.5	20.3	9.0	17.0	10	1.0	21.5	yellow	EP $438 - M 14 \times 1.5$	
M 16 × 1.5	23.6	10.0	20.0	13	1.0	24.5	yellow	EP $438 - M 16 \times 1.5$	
M 18 × 1.5	25.5	11.0	20.6	13	1.0	26.5	yellow	EP $438 - M 18 \times 1.5$	
M 22 × 1.5	28.4	12.2	21.7	15	1.0	29.5	yellow	EP $438 - M 22 \times 1.5$	
M 27 × 2	33.4	15.0	25.0	19	1.0	34.5	yellow	EP $438 - M 27 \times 2$	
M 30 × 2	35.9	10.0	20.0	24	1.0	37.0	yellow	EP $438 - M 30 \times 2$	
M 33 × 2	42.5	15.0	25.0	24	1.0	43.5	yellow	EP $438 - M 33 \times 2$	
M 36 × 2	44.1	10.0	20.0	24	1.0	47.0	yellow	EP $438 - M 36 \times 2$	
M 42 × 2	51.3	15.0	26.0	24	1.0	52.5	yellow	EP $438 - M 42 \times 2$	
M 45 × 2	54.9	14.6	25.7	30	1.0	56.0	yellow	EP $438 - M 45 \times 2$	
M 48 × 2	56.7	17.0	28.0	30	1.0	57.5	yellow	EP $438 - M 48 \times 2$	
M 52 × 2	60.5	17.0	27.7	30	1.0	61.0	yellow	EP $438 - M 52 \times 2$	

Material:

Premium, impact resistant Nylon (PA 6)

Standard Colours:

yellow, natural

Threaded sealing plug design EP 436 complete with washer provides an outstanding seal force useable under complicated working conditions.

Think Plastic. Go Protec.®



ISO 11926-1

7/16 – 20 UNF	17.5	9.2	16.0	10	1.0	18.5	natural	EP 4387/16" - 20 UNF
9/16 – 18 UNF	21.4	10.0	18.0	10	1.0	22.5	natural	EP 4389/16" - 18 UNF
3/ 4 – 16 UNF	27.3	11.0	21.0	13	1.0	28.0	natural	EP 4383/ 4" - 16 UNF
7/ 8 – 14 UNF	30.5	13.0	23.0	15	1.0	31.5	natural	EP 4387/ 8" - 14 UNF
1 1/16 – 12 UN	38.2	15.0	25.0	19	1.0	39.0	natural	EP 438 – 1.1/16" – 12 UN
1 5/16 – 12 UN	44.8	15.0	25.0	24	1.0	46.0	natural	EP 438 – 1.5/16" – 12 UN
1 5/ 8 – 12 UN	56.0	15.0	26.0	30	1.0	61.0	natural	EP 438 – 1.5/ 8" – 12 UN
1 7/ 8 – 12 UN	63.7	15.0	26.0	30	1.0	64.5	natural	EP 438 – 1.7/ 8" – 12 UN

Should your requirements not be shown please ask for a separate quotation. PROTEC products and specifications are subject to improvement and change without notice.

Threaded Sealing Plugs with assembled washer

EP 438

Threaded sealing plug design EP 436 complete with washer provides an outstanding seal force useable under complicated working conditions

TRIPLE ADVANTAGE of PROTEC CAPTOP

QUALITY. EP 436 body design .For particularly high demands on tightness with additional factory-made fitting of an neoprene rubber sealing washer. Exist in a wide range of metric, Whitworth and UNF thread types. Head designed to drain leakage.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. Innovative protective closures at the best price in the market.





Material:

Premium, impact resistant Nylon (PA 6)

Standard Colours :

yellow, natural

Individual Productions :

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

