


Quick-Fit® Thread Reducers

Nylon Reducers with large external thread and small internal thread

M → M

strong

FLEXIBLE PRODUCTION

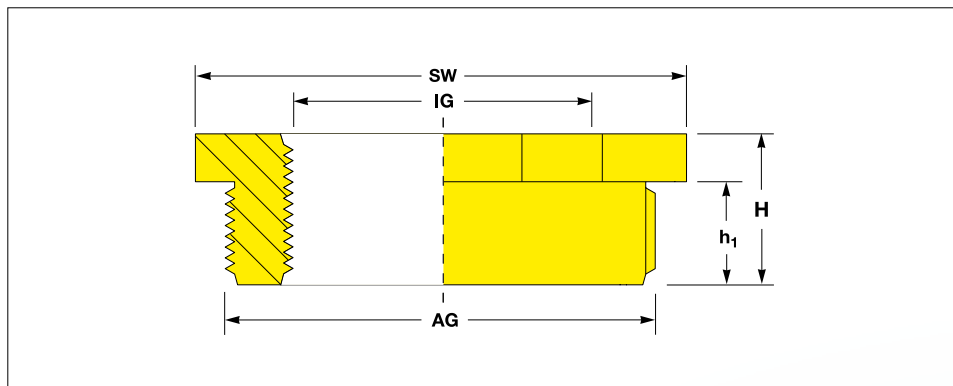

Metric

All dimensions in mm

from	to		
Thread external	Thread internal	Spanner size	Reference-No.
AG	IG	SW	
M 16	M 12	SW 24	EPN 550 / M 16 → M 12
M 20	M 12	SW 24	EPN 550 / M 20 → M 12
M 20	M 16	SW 24	EPN 550 / M 20 → M 16
M 25	M 12	SW 32	EPN 550 / M 25 → M 12
M 25	M 16	SW 29	EPN 550 / M 25 → M 16
M 25	M 20	SW 29	EPN 550 / M 25 → M 20
M 32	M 12	SW 36	EPN 550 / M 32 → M 12
M 32	M 16	SW 36	EPN 550 / M 32 → M 16
M 32	M 20	SW 36	EPN 550 / M 32 → M 20
M 32	M 25	SW 36	EPN 550 / M 32 → M 25
M 40	M 16	SW 46	EPN 550 / M 40 → M 16
M 40	M 20	SW 46	EPN 550 / M 40 → M 20
M 40	M 25	SW 46	EPN 550 / M 40 → M 25
M 40	M 32	SW 46	EPN 550 / M 40 → M 32
M 50	M 20	SW 55	EPN 550 / M 50 → M 20
M 50	M 25	SW 55	EPN 550 / M 50 → M 25
M 50	M 32	SW 55	EPN 550 / M 50 → M 32
M 50	M 40	SW 55	EPN 550 / M 50 → M 40
M 63	M 25	SW 68	EPN 550 / M 63 → M 25
M 63	M 32	SW 68	EPN 550 / M 63 → M 32
M 63	M 40	SW 68	EPN 550 / M 63 → M 40
M 63	M 50	SW 68	EPN 550 / M 63 → M 50

Material :
PA 6,
impact resistant nylon

Standard Colour :
light grey RAL 7035

Nylon Reducers with large external thread and small internal thread

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Thread Reducers

Nylon Reducers with large external thread and small internal thread

PG → PG

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. This component reduces the threaded entry diameter on any threaded connector from a larger to smaller thread size to accept a gland.

Configuration: from large external Metric to small Metric and from large external PG to small internal PG.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



PG

from	to	All dimensions in mm	
Thread external	Thread internal	Spanner size	Reference-No.
AG	IG	SW	
PG 9	PG 7	SW 24	EPN 550 / PG 9 → PG 7
PG 11	PG 7	SW 22	EPN 550 / PG 11 → PG 7
PG 11	PG 9	SW 22	EPN 550 / PG 11 → PG 9
PG 13.5	PG 7	SW 24	EPN 550 / PG 13.5 → PG 7
PG 13.5	PG 9	SW 24	EPN 550 / PG 13.5 → PG 9
PG 13.5	PG 11	SW 27	EPN 550 / PG 13.5 → PG 11
PG 16	PG 9	SW 27	EPN 550 / PG 16 → PG 9
PG 16	PG 11	SW 27	EPN 550 / PG 16 → PG 11
PG 16	PG 13.5	SW 27	EPN 550 / PG 16 → PG 13.5
PG 21	PG 11	SW 32	EPN 550 / PG 21 → PG 11
PG 21	PG 13.5	SW 32	EPN 550 / PG 21 → PG 13.5
PG 21	PG 16	SW 32	EPN 550 / PG 21 → PG 16
PG 29	PG 13.5	SW 40	EPN 550 / PG 29 → PG 13.5
PG 29	PG 16	SW 40	EPN 550 / PG 29 → PG 16
PG 29	PG 21	SW 40	EPN 550 / PG 29 → PG 21
PG 36	PG 16	SW 60	EPN 550 / PG 36 → PG 16
PG 36	PG 21	SW 60	EPN 550 / PG 36 → PG 21
PG 36	PG 29	SW 50	EPN 550 / PG 36 → PG 29
PG 42	PG 21	SW 65	EPN 550 / PG 42 → PG 21
PG 42	PG 29	SW 65	EPN 550 / PG 42 → PG 29
PG 42	PG 36	SW 55	EPN 550 / PG 42 → PG 36
PG 48	PG 29	SW 70	EPN 550 / PG 48 → PG 29
PG 48	PG 36	SW 60	EPN 550 / PG 48 → PG 36
PG 48	PG 42	SW 70	EPN 550 / PG 48 → PG 42

Should your requirements not be shown please ask for a separate quotation.

PROTEC products and specifications are subject to improvement and change without notice.

Material :
PA 6,
impact resistant nylon

Standard Colour :
light grey RAL 7035

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

**PROTEC
PLASTICS**